



**Environmental
Product
Declaration**

According to EN15804+A2 (+indicators A1)



This declaration is for:
**Nordsjö Professional Interior Wall paint
fillers**

Provided by:
AkzoNobel Decorative Coatings



program operator
Stichting MRPI®
publisher
Stichting MRPI®
www.mrpi.nl

MRPI® registration
1.1.00600.2024
date of first issue
4-7-2024
date of this issue
4-7-2024
expiry date
4-7-2029





COMPANY INFORMATION


Nordsjö
 PROFESSIONAL
 AkzoNobel Decorative Coatings
 Staffanstorpsvägen 50
 232 61 Malmö
<https://www.akzonobel.com>

MRPI® REGISTRATION
 1.1.00600.2024

DATE OF ISSUE
 4-7-2024


EXPIRY DATE
 4-7-2029

SCOPE OF DECLARATION

This MRPI®-EPD certificate is verified by Gert-Jan Vroege, Eco Intelligence. The LCA study has been done by Mart van Assem & Robert Jan Volders, Ecomatters. The certificate is based on an LCA-dossier according to EN15804+A2 (+indicators A1). It is verified according to the 'MRPI®-EPD verification protocol November 2020.v4.0'. EPD's of construction products may not be comparable if they do not comply with EN15804+A2. Declaration of SVHC that are listed on the 'Candidate list of Substances of Very High Concern for authorisation' when content exceeds the limits for registration with ECHA.

PROGRAM OPERATOR

Stichting MRPI®
 Kingsfordweg 151
 1043 GR
 Amsterdam

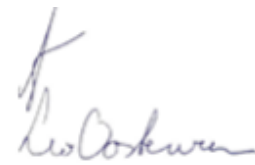

Ing. L. L. Oosterveen MSc. MBA
 Managing Director MRPI

PRODUCT

Nordsjö Professional Interior Wall paint fillers

DECLARED UNIT/FUNCTIONAL UNIT

All impacts are calculated using the declared unit "decoration of 1 m2 of surface"

DESCRIPTION OF PRODUCT

Nordsjö Professional range of fillers for all purposes for repairing walls and ceilings ready for covering with paint.


VISUAL PRODUCT



MORE INFORMATION

- <https://www.nordsjoprofessional.se/sv/produkter/nordsj%C3%B6-professional-medium-spackel?size=235G>
- <https://www.nordsjoprofessional.se/sv/produkter/nordsj%C3%B6-professional-grov?size=10L>
- <https://www.nordsjoprofessional.se/sv/produkter/nordsj%C3%B6-professional-rem-skarv-spackel?size=10L>
- <https://www.nordsjoprofessional.se/sv/produkter/nordsj%C3%B6-professional-rullspackel?size=15L>

DEMONSTRATION OF VERIFICATION

CEN standard EN15804 serves as the core PCR(a)	
Independent verification of the declaration an data according to EN15804+A2 (+indicators A1)	
internal:	external: x
Third party verifier: Gert-Jan Vroege, Eco-Intelligence	
	
[a] PCR = Product Category Rules	



DETAILED PRODUCT DESCRIPTION

Nordsjö Professional offers a wide range of fillers for all purposes. Nordsjö fillers are designed to cover different application methods; traditional handapplication with spatula, application with roller, filler boxes, bazookas and time saving spray application. Nordsjö Professional is known for offering very good, high performing fillers that are easy to apply and sand. The high quality is also time and money saving, supporting your ergonomics and you can always expect a perfect end result ready for covering with paint.

Typical Use
Interior walls

Production process and conditions of delivery

The manufacturing stage consists of four main stages: premixing, dispersion, adjusting, and filling. The first stage is premixing where pigments, extenders, binders, additives, and solvents are weighted and mixed. The next stage is the dispersion process where the pigments and extenders are grinded, embedded in binders, and stabilized. In the adjusting stage, the coating mixture is adjusted by adding more solvent/water or additives. The last two steps include the filling of the product into bags or cans and loading it into pallets.

Component	%
Pigments	Confidential
Binder	Confidential
Additive	Confidential

SCOPE AND TYPE

The type of this EPD is Cradle-to-Gate with options. All major steps from the extraction of natural resources to the final disposal of the product are included in the environmental performance of the manufacturing phase, except those that are not relevant to the environmental performance of the product. This declaration does not imply an indicator result of zero.

This EPD is representative for products produced in Malmö, Sweden and the application market is for customers in Europe. Likewise, for the end-of-life, the fate of the paint product is described within a European context.


The software LCA for Experts 10.8.0.14 Professional is used to perform the LCA. In the model Ecoinvent 3.10 database was used.

The validity of this EPD is in correspondence with the specifications of the LCA project report.

All impacts associated with the upstream production of materials and energy are included in the system boundaries. Mining activities and controlled landfills are included in the product systems. The emissions and resource extractions derived from these processes are considered elementary exchanges between the product systems and the environment.

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USER STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport gate to site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse - Recovery – Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

X= Modules Assessed
ND= Not Declared

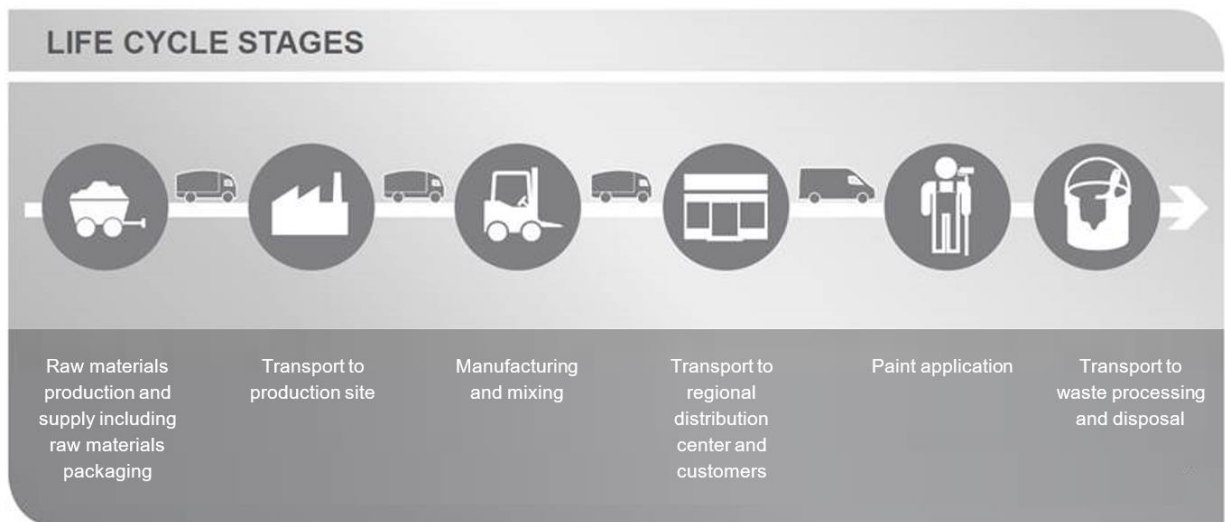

REPRESENTATIVENESS

This EPD is representative for the following filler products belonging to the Nordsjö Professional Interior Wall Fillers group:

1. Nordsjö Professional Mediumspackel
2. Nordsjö Professional Medium Sprutspackel
3. Nordsjö Professional Rullspackel
4. Nordsjö Professional Grovspackel
5. Nordsjö Professional Grov Rullspackel
6. Nordsjö Professional Grov Sprutspackel
7. Nordsjö Professional Rems- & Skarvspackel
8. Nordsjö Professional Rems & Skarv Sprutspackel

This EPD is representative for the products manufactured in Malmö, Sweden, Pilawa, Poland and France, Montataire and sold in Europe.

ENVIRONMENT IMPACT per functional unit or declared unit (core indicators A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO2 eq.	4,82 E-01	4,83 E-02	1,19 E-01	6,49 E-01	7,43 E-02	9,47 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	8,09 E-03	0,00 E+00	2,78 E-01	0,00 E+00
GWP-fossil	kg CO2 eq.	4,93 E-01	4,82 E-02	1,76 E-01	7,17 E-01	7,42 E-02	5,23 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	8,09 E-03	0,00 E+00	2,78 E-01	0,00 E+00
GWP-biogenic	kg CO2 eq.	-1,48 E-02	2,50 E-05	-5,74 E-02	-7,22 E-02	3,86 E-05	4,24 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	4,20 E-06	0,00 E+00	1,30 E-05	0,00 E+00
GWP-luluc	kg CO2 eq.	4,14 E-03	1,66 E-05	1,60 E-04	4,32 E-03	2,56 E-05	1,35 E-06	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	2,79 E-06	0,00 E+00	3,30 E-06	0,00 E+00
ODP	kg CFC11 eq.	6,13 E-08	9,75 E-10	2,85 E-09	6,52 E-08	1,50 E-09	5,37 E-11	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,63 E-10	0,00 E+00	1,97 E-10	0,00 E+00
AP	mol H+ eq.	3,14 E-03	1,92 E-04	6,39 E-04	3,97 E-03	2,96 E-04	1,93 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	3,22 E-05	0,00 E+00	6,03 E-05	0,00 E+00
EP-freshwater	kg PO4 eq.	1,31 E-04	3,30 E-06	2,88 E-05	1,63 E-04	5,08 E-06	6,69 E-07	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	5,53 E-07	0,00 E+00	8,18 E-07	0,00 E+00
EP-marine	kg N eq.	6,45 E-04	7,23 E-05	1,40 E-04	8,58 E-04	1,11 E-04	1,89 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,21 E-05	0,00 E+00	2,49 E-05	0,00 E+00
EP-terrestrial	mol N eq.	5,28 E-03	7,84 E-04	1,40 E-03	7,47 E-03	1,21 E-03	8,53 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,32 E-04	0,00 E+00	2,72 E-04	0,00 E+00
POCP	kg NMVOC eq.	1,72 E-03	3,03 E-04	6,86 E-04	2,71 E-03	4,67 E-04	8,99 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	5,09 E-05	0,00 E+00	8,53 E-05	0,00 E+00
ADP-minerals & metals	kg Sb eq.	2,73 E-06	1,31 E-07	6,44 E-07	3,51 E-06	2,02 E-07	1,16 E-08	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	2,20 E-08	0,00 E+00	1,35 E-08	0,00 E+00
ADP-fossil	MJ, net calorific value	1,01 E+01	7,05 E-01	3,65 E+00	1,45 E+01	1,09 E+00	4,18 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,18 E-01	0,00 E+00	1,54 E-01	0,00 E+00
WDP	m3 world eq. Deprived	5,66 E+00	4,52 E-03	8,40 E-02	5,75 E+00	6,96 E-03	-3,82 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	7,58 E-04	0,00 E+00	8,04 E-03	0,00 E+00

GWP-total = Global Warming Potential total
 GWP-fossil = Global Warming Potential fossil fuels
 GWP-biogenic = Global Warming Potential biogenic
 GWP-luluc = Global Warming Potential land use and land use change
 ODP = Depletion potential of the stratospheric ozone layer
 AP = Acidification Potential, Accumulated Exceedence
 EP-freshwater = Eutrophication Potential, fraction of nutrients reaching freshwater end compartment
 EP-marine = Eutrophication Potential, fraction of nutrients reaching marine end compartment
 EP-terrestrial = Eutrophication Potential, Accumulated Exceedence
 POCP = Formation potential of tropospheric ozone photochemical oxidants
 ADP-minerals&metals = Abiotic Depletion Potential for non-fossil resources [2]
 ADP-fossil = Abiotic Depletion for fossil resources potential [2]
 WDP = Water (user) deprivation potential, deprivation-weighted water consumption [2]

Disclaimer [2]

- The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator



ENVIRONMENT IMPACT per functional unit or declared unit (additional indicators A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	5,34 E-08	3,80 E-09	6,33 E-09	6,35 E-08	5,85 E-09	2,60 E-10	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	6,37 E-10	0,00 E+00	1,01 E-09	0,00 E+00
IRP	kBq U235 eq.	8,40 E-02	8,55 E-04	7,88 E-03	9,27 E-02	1,32 E-03	7,59 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,43 E-04	0,00 E+00	1,35 E-04	0,00 E+00
ETP-fw	CTUe	5,73 E+00	1,67 E-01	8,11 E-01	6,71 E+00	2,57 E-01	4,61 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	2,80 E-02	0,00 E+00	1,15 E-01	0,00 E+00
HTP-c	CTUh	5,03 E-10	3,01 E-10	6,03 E-10	1,41 E-09	4,64 E-10	7,00 E-11	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	5,05 E-11	0,00 E+00	4,00 E-10	0,00 E+00
HTP-nc	CTUh	6,06 E-09	4,21 E-10	1,06 E-09	7,55 E-09	6,49 E-10	2,47 E-10	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	7,06 E-11	0,00 E+00	1,06 E-09	0,00 E+00
SQP	----	5,04 E+00	7,07 E-01	6,77 E+00	1,25 E+01	1,09 E+00	4,43 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,19 E-01	0,00 E+00	2,61 E-01	0,00 E+00

PM = Potential incidence of disease due to PM emissions
 IRP = Potential Human exposure efficiency relative to U235 [1]
 ETP-fw = Potential Comparative Toxic Unit for ecosystems [2]
 HTP-c = Potential Comparative Toxic Unit for humans [2]
 HTP-nc = Potential Comparative Toxic Unit for humans, non-cancer [2]
 SQP = Potential soil quality index [2]

Disclaimer [1]
 - This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste.

Disclaimer [2]
 - The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.



OUTPUT FLOWS AND WASTE CATEGORIES per functional unit or declared unit (A1 / A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	0,00 E+00	0,00 E+00	7,82 E-03	7,82 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
NHWD	kg	0,00 E+00	0,00 E+00	1,45 E-02	1,45 E-02	0,00 E+00	9,88 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	9,49 E-01	0,00 E+00
RWD	kg	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
CRU	kg	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
MFR	kg	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	3,97 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
MER	kg	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
EEE	MJ	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
ETE	MJ	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00

HWD = Hazardous Waste Disposed
 NHWD = Non Hazardous Waste Disposed
 RWD = Radioactive Waste Disposed
 CRU = Components for reuse
 MFR = Materials for recycling
 MER = Materials for energy recovery
 EEE = Exported Electrical Energy
 ETE = Exported Thermal Energy



RESOURCE USE per functional unit or declared unit (A1 / A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	1,05 E+00	1,12 E-02	1,74 E+00	2,80 E+00	1,72 E-02	1,19 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,88 E-03	0,00 E+00	1,97 E-03	0,00 E+00
PERM	MJ	1,35 E-04	1,60 E-09	1,03 E-02	1,04 E-02	2,47 E-09	2,30 E-10	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	2,69 E-10	0,00 E+00	4,80 E-10	0,00 E+00
PERT	MJ	1,05 E+00	1,12 E-02	1,75 E+00	2,81 E+00	1,72 E-02	1,19 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,88 E-03	0,00 E+00	1,97 E-03	0,00 E+00
PENRE	MJ	9,38 E+00	7,06 E-01	3,65 E+00	1,37 E+01	1,09 E+00	4,18 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,18 E-01	0,00 E+00	1,54 E-01	0,00 E+00
PENRM	MJ	2,34 E-05	0,00 E+00	1,19 E-07	2,35 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
PENRT	MJ	9,41 E+00	7,06 E-01	3,65 E+00	1,38 E+01	1,09 E+00	4,18 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,18 E-01	0,00 E+00	1,54 E-01	0,00 E+00
SM	kg	0,00 E+00	0,00 E+00	8,84 E-03	8,84 E-03	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
RSF	MJ	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
NRSF	MJ	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
FW	m3	1,19 E-01	1,05 E-04	1,96 E-03	1,21 E-01	1,62 E-04	-8,90 E-05	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	1,77 E-05	0,00 E+00	1,87 E-04	0,00 E+00

PERE = Use of renewable energy excluding renewable primary energy resources

PERM = Use of renewable energy resources used as raw materials

PERT = Total use of renewable primary energy resources

PENRE = Use of non-renewable primary energy resources excluding non-renewable energy resources used as raw materials

PENRM = Use of non-renewable primary energy resources used as raw materials

PENRT = Total use of non-renewable primary energy resources

SM = Use of secondary materials

RSF = Use of renewable secondary fuels

NRSF = Use of non-renewable secondary fuels

FW = Use of net fresh water

BIOGENIC CARBON CONTENT per functional unit or declared unit (A1 / A2)

	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
BBCpr	Kg C	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00
BCCpa	kg C	0,00 E+00	0,00 E+00	-2,27 E-02	-2,27 E-02	0,00 E+00	2,27 E-02	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00	0,00 E+00

BBCpr = Biogenic carbon content in product

BCCpa = Biogenic carbon content in packaging



CALCULATION RULES

Cut off criteria

The cut-off is considered in the raw material supply stage (A1). Cut-off of inputs comprises of the raw materials, for which no appropriate proxies were found. In this study there were no cut-off inputs. For recycling of waste packaging material (metal and plastic), a cut-off approach was followed. The cut-off point is chosen to be the end of waste treatment.

Data quality and data collection period

Specific data was collected from AkzoNobel through a questionnaire, including inquiries about paint characteristics and packaging, logistics data (e.g. transport), production information and end-of-life. The data collection period for specific data was the year 2022.

Data gaps (i.e. transport data, end of life scenarios) were covered with data generic values for transport as described in the Product Environmental Footprint Category Rules - Decorative Paints document version 1.0 published by CEPE and reviewed in April 2018. Further data gaps (i.e. end-of-life transport data) were covered with data from internal AkzoNobel LCA studies concerning the same type of products (paints and coatings). Generic data (i.e. upstream acquisition and production of raw materials, energy generation, transport, waste treatment processes) was selected from Ecoinvent 3.10 database. In the case of missing data, a relevant proxy was searched and adjusted to the corresponding unit process.

Allocation procedure

To allocate the emissions and inputs to the manufactured products, the decision-hierarchy in ISO 14044 is used (ISO 2006). It is not possible to sub-divide the site data into a more detailed level or find physical causalities between inputs and outputs, thus allocation is done based on mass, considering the annual production of paint product for each site. The paint production is basically a process of mixing ingredients and, therefore, the environmental impact is fairly likely to be related to the mass of the products.

Parameter	Unit	Value
VOC Content	g/l	0,30
Density	kg/l	1,08
Coverage	m ² /l	1,84
Number of layers	Quantity	1,14
Total product used	kg/m ²	0,95

SCENARIOS AND ADDITIONAL TECHNICAL INFORMATION

A1. Raw materials supply

This module considers the extraction and processing of all raw materials and energy which occur upstream to the Nordsjö Professional Interior Wall Fillers manufacturing process, as well as waste processing up to the end-of waste state.

A2. Transport of raw materials to manufacturer

This includes the transport distance of the raw materials to the manufacturing facility via road.

Site	Malmö, Sweden
Vehicle type used for transport	Truck
Distance, km	460
Capacity	>32 t ,64% payload

A3. Manufacturing

This module covers the manufacturing of Nordsjö Professional Interior Wall Fillers and includes all processes linked to production such as storing, mixing, packing and internal transportation. Use of electricity, fuels and auxiliary materials in paint production is taken into account as well.

Data regarding paint production was provided for the manufacturing site where the Nordsjö Professional Interior Wall Fillers was produced. Furthermore, the transportation distances and transportation modes for transportation to distribution centre and to customer were used from the PCR for decorative coatings. Primary data and site-specific data were retrieved. For electricity sources for Malmö, Sweden 100% hydropower was used from the Ecoinvent 3.10 database. For upstream (raw material processes) and downstream processes (application, use, and waste processing) generic data is used when no specific data is obtained.



The construction site data includes lighting, heating, offices, etc. The manufacture of production equipment and infrastructure is not included in the system boundary.

A4. Transport to Regional Distribution Centre and customer

All paint containers are transported from the production facility into a distribution centre and then finally to the customer. On average, the transport characteristics for this life cycle stage are the following

Production site	Malmö, Sweden	Malmö, Sweden
Coatings transport type	Transport from factory to RDC	Transport from RDC to PoS
Transport Type	Truck	Truck
Distance (km)	350	370
Capacity	>32 t ,64% payload	>32 t ,64% payload

A5. Application and use

This module includes the environmental aspects and impacts associated with the application and of the paint. It is assumed that no energy is required during the application of this paint. The use of paintbrushes and other appliances used during application are not included. There are some raw materials added in the paint formulations which contain small amounts of solvents. The VOC emissions during application of paint are included in this module.

C2. Transport to incineration or landfill

This module includes one-way transportation distance of the demolition or sorting site to the dump site.

End-of-life transport type	Transport to waste processing
Vehicle type	Truck
Distance	80
Capacity utilisation	60%

C3. Waste processing and C4. Disposal

The end of life stage is encompassed in these modules. It is assumed that paint is used as interior paint and exterior paint. In both cases, it is assumed that part of the paint is lost during application and the rest is applied.

Classification of paint, based on function	% of sold paint to landfill	% of sold paint to incineration
Interior Masonry Wall	88%	12%
Exterior, Trim and other paints	88%	12%

DECLARATION OF SVHC

None.

REFERENCES

- AkzoNobel, Decorative Coatings study 2023.
- Assari, Mohammad Reza, et al. (2014) Exergy modeling and performance evaluation of pulp and paper production process of bagasse, a case study. Thermal Science 18.4 (2014): 1399-1412.
- CEPE, Raw materials LCI database for the European Council of the Paint, Printing Ink and Artists' Colours Industry (CEPE), version 3.0, IVL Swedish Environmental Research Institute, 2016
- EN 15804:2012+A2:2019 Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products, of 2019.
- ISO 14040/14044 on Life Cycle Assessments
- Lamlo, S. H., and R. A. Savidge. (2003) A reassessment of carbon content in wood: variation within and between 41 North American species." Biomass and Bioenergy 25.4: 381-388.



- Product Environmental Footprint Category Rules - Decorative Paints version 1.0, 2018. Developed by the Technical Secretariat Decorative Paints of the European Council of the Paint, Printing Ink and Artists' Colours Industry.
- Sphera GaBi Software-System and Database for Life Cycle Engineering. Copyright 1992-2018 Sphera.
- Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., and Weidema, B., 2016. The ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, [online] 21(9), pp.1218–1230. Available at: <<http://link.springer.com/10.1007/s11367-016-1087-8>> [Accessed 20-01-2021]
- Job Coenen, 2024, Personal communication with Job Coenen, Senior Program Manager Sustainability, AkzoNobel.

**REMARKS**

None.